


Tilt - hanglamp bol ø12 IP44 - inclusief dimbare G9-6W - inkortbaar snoer - kantelbaar - 2700 K
Tilt - pendant lamp ball ø12 IP44 - including dimmable G9-6W - shortenable cord - tiltable - 2700 K



Product render

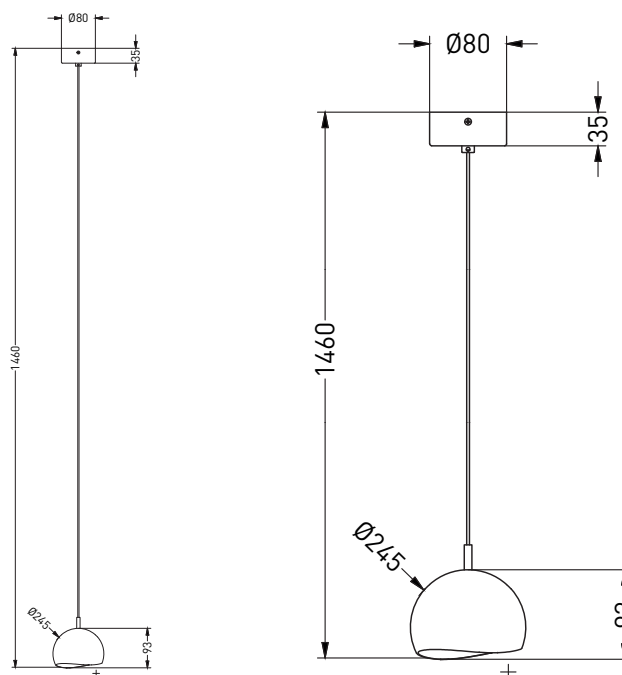

Technische tekening / Technical drawing

1. Product informatie / Product information	
1.2 Elektrische klasse / Electrical class	Klasse II / Class II
1.3 Dimbaar / Dimmable (triac/1-10V/DALI)	Triac
1.4 IP	IP44
2. Elektrische data / Electrical class	
2.1 Systeemvermogen / system power (W)	6W
2.2 Licht type / Lighting type	LED
2.3 Voltage (V)	220-240V
2.4 Frequentie / Frequency (Hz)	50-60Hz
2.5 Max. armaturen per zekering / Max. luminaires per fuse	-
3. Energie / Energy	
3.1 Energielabel / Energy label	F
4. Levensduur / lifetime	
4.1 Levensduur / Lifespan	25000 uur / hour
4.2 Garantie / Warranty	2 jaar / 2 years

5. Fotometrische data / Photometric data

5.1 Vermogen lumen / Lumen output (lm)	545lm
5.2 Efficiëntie / Efficiency (Lm/W)	94Lm/W
5.3 Correlated Colour Temperature - CCT (K)	2700K
5.4 Colour Rendering Index - CRI	94
5.5 Standard Deviation of Colour Matching - SDCM	4,5
5.6 Stralingshoek / Beam angle	180°
5.7 Vermogensfactor / Power factor	0,918
5.8 Flikkerpercentage / Flickering percentage	PST < 1, SVM < 0,4 %
5.9 Omgevingstemperatuurbereik / Ambient temp. range	-10°C tot / to 40°C

6. Materiaal & afmetingen / Material & dimensions

6.1 Behuizingsmateriaal / Housing material	Aluminium, ijzer & acryl / Aluminium, iron & acrylic
6.3 Lens materiaal / lens material	Acryl / Acrylic
6.4 Installatie methode / Installation method	Plafond montage / Ceiling mounted
6.5 Breedte/diameter / Width/diameter	ø120mm
6.6 Lengte / Length	/
6.7 Hoogte / height	1600mm
6.8 Uitsparing / cut out	/
6.9 Installatie diepte / Installation depth	/
6.10 Gewicht / Weight	0,72KG
6.11 Armatuur afdekbaar / Luminaire coverable	Nee / No