


Crystal - hanglamp bol helder glas ø13 IP44 - inclusief dimbare G9-2,5W - inkortbaar snoer - 2700 K

Crystal - pendant lamp ball clear glass ø13 IP44 - including dimmable G9-2,5W - shortenable cord - 2700 K



Product render

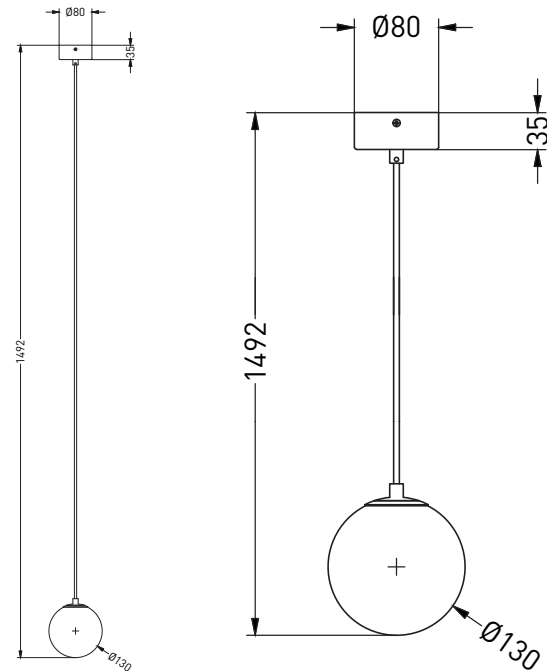

Technische tekening / Technical drawing

1. Product informatie / Product information	
1.2 Elektrische klasse / Electrical class	Klasse II / Class II
1.3 Dimbaar / Dimmable (triac/1-10V/DALI)	Triac
1.4 IP	IP44
2. Elektrische data / Electrical class	
2.1 Systeemvermogen / system power (W)	2,5W
2.2 Licht type / Lighting type	G9 LED
2.3 Voltage (V)	220-240V
2.4 Frequentie / Frequency (Hz)	50-60Hz
2.5 Max. armaturen per zekering / Max. luminaires per fuse	-
3. Energie / Energy	
3.1 Energielabel / Energy label	E
4. Levensduur / lifetime	
4.1 Levensduur / Lifespan	25000 uur / hour
4.2 Garantie / Warranty	2 jaar / 2 years

5. Fotometrische data / <i>Photometric data</i>	
5.1 Vermogen lumen / <i>Lumen output (lm)</i>	275lm
5.2 Efficiëntie / <i>Efficiency (Lm/W)</i>	114Lm/W
5.3 Correlated Colour Temperature - CCT (K)	2700K
5.4 Colour Rendering Index - CRI	84
5.5 Standard Deviation of Colour Matching - SDCM	3,2
5.6 Stralingshoek / <i>Beam angle</i>	360°
5.7 Vermogensfactor / <i>Power factor</i>	0,976
5.8 Flikkerpercentage / <i>Flickering percentage</i>	PST < 1, SVM < 0,4 %
5.9 Omgevingstemperatuurbereik / <i>Ambient temp. range</i>	-10°C tot / <i>to</i> 40°C
6. Materiaal & afmetingen / <i>Material & dimensions</i>	
6.1 Behuizingsmateriaal / <i>Housing material</i>	Aluminium, ijzer & glas / <i>Aluminium, iron & glass</i>
6.3 Lens materiaal / <i>lens material</i>	Glas / <i>Glass</i>
6.4 Installatie methode / <i>Installation method</i>	Plafond montage / <i>Ceiling mounted</i>
6.5 Breedte/diameter / <i>Width/diameter</i>	ø130mm
6.6 Lengte / <i>Length</i>	/
6.7 Hoogte / <i>height</i>	1630mm
6.8 Uitsparing / <i>cut out</i>	/
6.9 Installatie diepte / <i>Installation depth</i>	/
6.10 Gewicht / <i>Weight</i>	0,79KG
6.11 Armatuur afdekbaar / <i>Luminaire coverable</i>	Nee / <i>No</i>