


**Cloud - rechthoekige wandlamp onder + boven verlichting IP44 - inclusief dimbare GU10-5W - 2700 K**  
*Cloud - rectangular wall lamp top and bottom lighting IP44 - including dimmable GU10-5W - 2700 K*



Product render

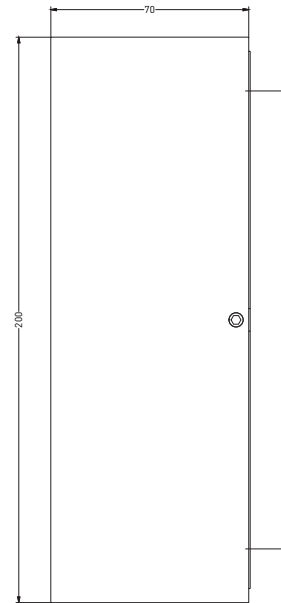

Technische tekening / Technical drawing

| 1. Product informatie / Product information                |                    |
|------------------------------------------------------------|--------------------|
| 1.2 Elektrische klasse / Electrical class                  | Klasse I / Class I |
| 1.3 Dimbaar / Dimmable (triac/1-10V/DALI)                  | Triac              |
| 1.4 IP                                                     | IP54               |
| 2. Elektrische data / Electrical class                     |                    |
| 2.1 Systeemvermogen / system power (W)                     | 5W                 |
| 2.2 Licht type / Lighting type                             | GU10 LED (2x)      |
| 2.3 Voltage (V)                                            | 220-240V           |
| 2.4 Frequentie / Frequency (Hz)                            | 50-60Hz            |
| 2.5 Max. armaturen per zekering / Max. luminaires per fuse | -                  |
| 3. Energie / Energy                                        |                    |
| 3.1 Energielabel / Energy label                            | F                  |
| 4. Levensduur / lifetime                                   |                    |
| 4.1 Levensduur / Lifespan                                  | 25000 uur / hour   |
| 4.2 Garantie / Warranty                                    | 2 jaar / 2 years   |

| 5. Fotometrische data / Photometric data             |                                      |
|------------------------------------------------------|--------------------------------------|
| 5.1 Vermogen lumen / Lumen output (lm)               | 460lm                                |
| 5.2 Efficiëntie / Efficiency (Lm/W)                  | 92Lm/W                               |
| 5.3 Correlated Colour Temperature - CCT (K)          | 2700K                                |
| 5.4 Colour Rendering Index - CRI                     | 81,5                                 |
| 5.5 Standard Deviation of Colour Matching - SDCM     | 3                                    |
| 5.6 Stralingshoek / Beam angle                       | 38°                                  |
| 5.7 Vermogensfactor / Power factor                   | 0,73                                 |
| 5.8 Flikkerpercentage / Flickering percentage        | PST < 1, SVM < 0,4 %                 |
| 5.9 Omgevingstemperatuurbereik / Ambient temp. range | -10°C tot / to 40°C                  |
| 6. Materiaal & afmetingen / Material & dimensions    |                                      |
| 6.1 Behuizingsmateriaal / Housing material           | Aluminium & Glas / Aluminium & Glass |
| 6.3 Lens materiaal / lens material                   | Glas / Glass                         |
| 6.4 Installatie methode / Installation method        | Wandmontage / Wall mounted           |
| 6.5 Breedte/diameter / Width/diameter                | 70mm                                 |
| 6.6 Lengte / Length                                  | 72mm                                 |
| 6.7 Hoogte / height                                  | 200mm                                |
| 6.8 Uitsparing / cut out                             | /                                    |
| 6.9 Installatie diepte / Installation depth          | /                                    |
| 6.10 Gewicht / Weight                                | 0,63KG                               |
| 6.11 Armatuur afdekbaar / Luminaire coverable        | Nee / No                             |